

**ADD THE ART
OF NATURAL
PERFECTION.**

600x600mm
SATIN MATT —————





True representation of unique craftsmanship

If you truly have an eye for craftsmanship, you would surely consider these designs for your settings.

PRODUCT

A perfect size to fix at all the places and fill your space with grace. These regular size tiles are made to get along with uneven and impartial spaces with utter ease and simplicity.

Deliver your space the adequate lustre with subtle tenderness. Let your space reflect glimmer and shimmer of lustrous shades. Best laid along with metallic antiques these tiles showcase various unusual patterns to add flair to your space.

600x600mm | 600x1200mm

Spellbinding perfection
in every design

GVT | PGVT

Presenting the latest variants of polished vitrified tiles to introduce a well off nature to your abode. Granting a flawless fusion of muscle, grandeur, and endurance. Make the onlookers seek hidden strength and durability while they get dazed observe its luxuriant features, which is always justified through their outstanding endurance. Undergone a perfect procedure of tests & offering a durable quality product that could withstand heavy impacts. This remarkable product tends to stun you with the spellbinding galleria of textures.



HIGHLY
DURABLE



ACID
RESISTANT



STAIN
RESISTANT



EASY TO
CLEAN



DIMENSIONAL
STABILITY



SLIP
RESISTANCE



ECO
FRIENDLY



MAINTENANCE
FREE

SATIN SERIES

600X600MM



BOLONIA BIANCO

RANDOM
AVAILABLE 



BOLONIA BROWN

RANDOM
AVAILABLE 



BOLONIA BROWN

SATIN SERIES

600X600MM



ELEMENT BROWN



ELEMENT GRIS




ELEMENT IVORY



ELEMENT GRIS

SATIN SERIES

600X600MM

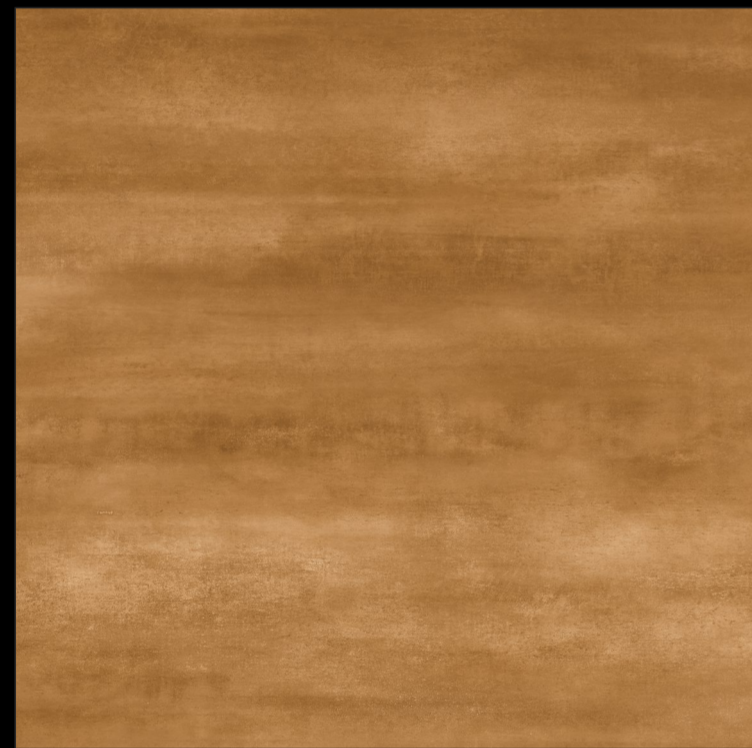


ISEN BROWN

RANDOM AVAILABLE




ISEN CREMA

RANDOM AVAILABLE

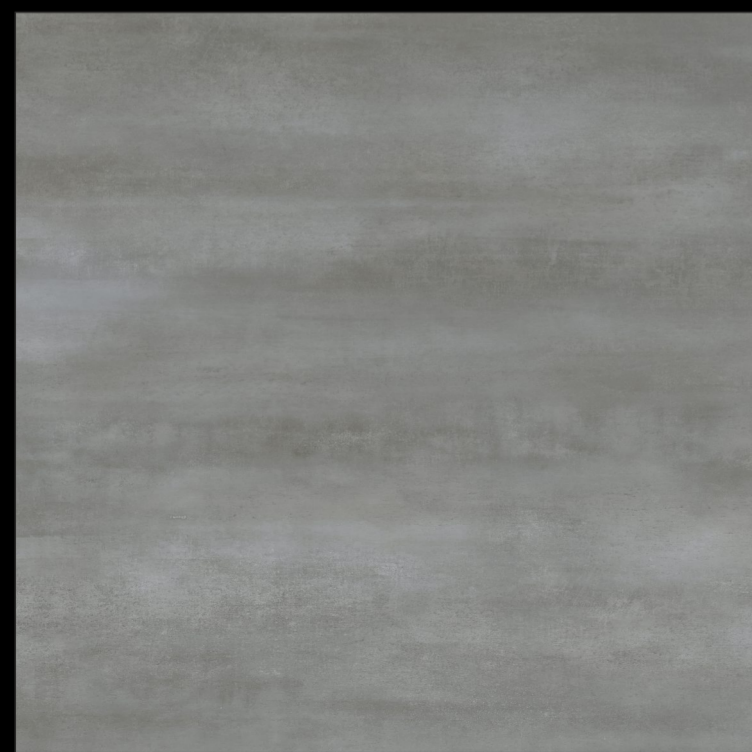

ISEN GREY

RANDOM AVAILABLE

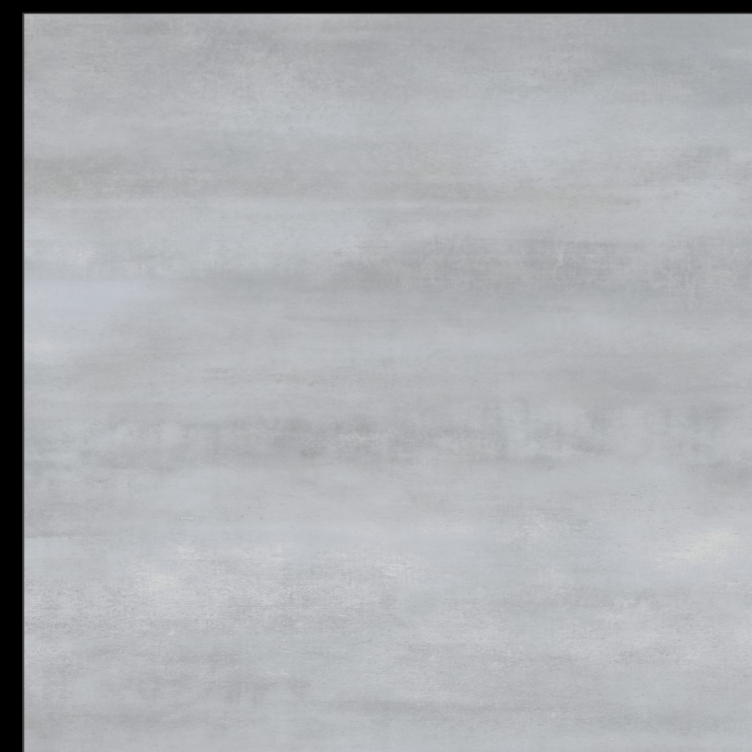

ISEN IRIS


RANDOM AVAILABLE



ISEN GREY

SATIN SERIES

600X600MM

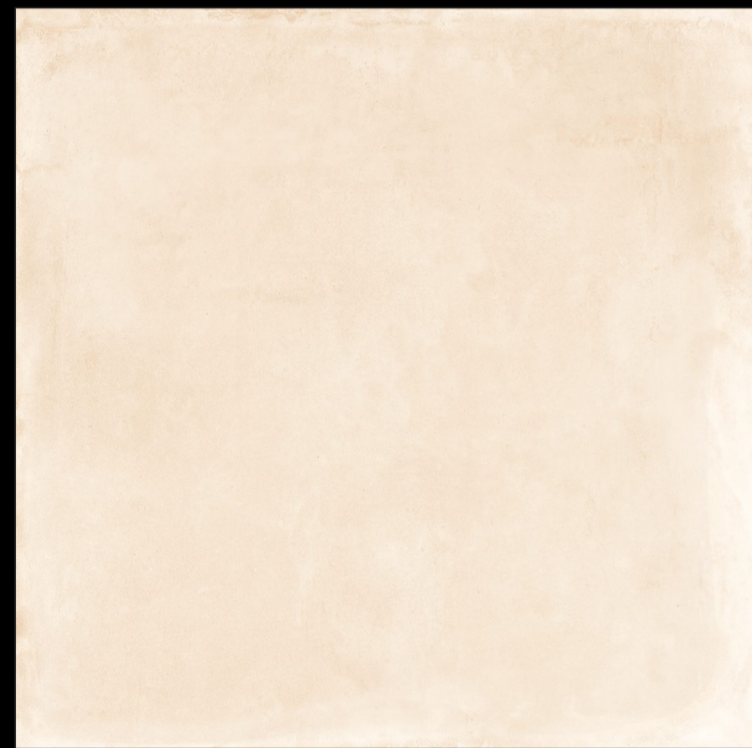

VANILLA CREMA



VANILLA GREY



VANILLA ORANGE



VANILLA SNOW



TECHNICAL SPECIFICATION

| CHARACTERISTIC | STANDARD AS PER ISO-13006 / En 14411 GROUP B1a | MEAN VALUE | TEST METHOD |
|---|---|-----------------------------|--------------|
| REGULATORY PROPERTIES | | | |
| Deviation In Length & Width | ±0.50% | ±0.10% | ISO 10545-2 |
| Deviation In Thickness | +5.00% | ±3.5% | ISO 10545-2 |
| Straightness In Side | ±0.50% | ±0.10% | ISO 10545-2 |
| Rectangularity | ±0.50% | ±0.2% | ISO 10545-2 |
| Surface Flatness | ±0.50% | ±0.2% | ISO 10545-2 |
| Color Difference | Unaltered | No Change | ISO 10545-16 |
| Glossiness | As per Manufacturer | Min 70% | Glossometer |
| STRUCTURAL PROPERTIES | | | |
| Water Absorption | ≤0.50% | ≤0.05% | ISO 10545-3 |
| Apparent Density | >2.00gm/cc | >2.28gm/cc | DIN 51082 |
| MASSIVE MECHANICAL PROPERTIES | | | |
| Flexural Modulus Of Rupture | Min 35 N/mm ² | Min 40 N/mm ² | ISO 10545-4 |
| Flexural Breaking Strength | Min 1300 N | Min 2000 N | ISO 10545-4 |
| Impact Resistance | As per Manufacturer | Min 0.55 | ISO 10545-4 |
| SURFACE MECHANICAL PROPERTIES | | | |
| Deep Abrasion Resistance | Max 175 mm ² | Max 132 mm ² | ISO 10545-6 |
| Moh's Hardness | Min 6 | 8* | EN 101 |
| THERMO HYGROMETRIC PROPERTIES | | | |
| Frost Resistance | No Damage | Frost Proof | ISO 10545-12 |
| Thermal Shock Resistance | No Damage | No Damage | ISO 10545-9 |
| Moisture Expansion | Nil | Nil | ISO 10545-10 |
| Thermal Expansion | Max 9.00 x 10 ⁻⁶ | Max 6.50 x 10 ⁻⁴ | ISO 10545-8 |
| CHEMICAL PROPERTIES | | | |
| Chemical Resistance | No Damage | No Damage | ISO 10545-13 |
| Stain Resistance | Resistant | Resistant | ISO 10545-14 |
| SAFETY PROPERTIES | | | |
| Slip Resistance (Friction Co-Efficient) | >0.40 | >0.40 | ISO 10545-17 |

PACKING DETAIL

| SR.NO | Nominal Size | Nominal Thickness | No. Tiles Per Box | Coverage Area Per Box |
|-------|--------------|-------------------|-------------------|------------------------------|
| 1 | 600 x 600 mm | 10.5 mm (Approx.) | 4 Pcs | 15.50 Sq. Ft / 1.44 Sq. Mtr. |